

STP325 - 24/Vfj
STP320 - 24/Vfj
STP315 - 24/Vfj

325 Watt

DOUBLE GLASS SOLAR MODULE



Features



High module conversion efficiency

Module efficiency up to 16.6% achieved through advanced cell technology and manufacturing capabilities



PID Free

Potential induced degradation (PID) free guaranteed



Positive tolerance

Guaranteed positive tolerance of 5 W delivers higher output



Suntech current sorting process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (2400 Pascal) *



High system voltage Compatible


Maximum 1500VDC system voltage saves total system cost

Certifications and standards:
IEC 61215, IEC 61730, conformity to CE



Trust Suntech to Deliver Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001: 2008, ISO 14001: 2004 and ISO17025: 2005
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (ammonia corrosion and sand blowing testing: IEC 62716, DIN EN 60068-2-68)***
- Long-term reliability tests
- 2 x 100% EL inspection ensuring defect-free modules




Frameless design

- Glass-Glass structure
- Economize grounding hardware
- Heat strengthened glass ensures high mechanical capability

Industry-leading Warranty based on nominal power

- 97.5% in the first year, thereafter, for years two (2) through thirty (30), 0.5% maximum decrease from MODULE's nominal power output per year, ending with the 83% in the 30th year after the defined WARRANTY STARTING DATE.****
- 12-year product warranty
- 30-year linear performance warranty

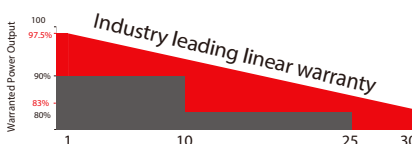


IP68 Rated Junction Box

The Suntech IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.


* Please refer to Suntech Double Glass Module Installation Manual for details.
 *** Please refer to Suntech Product Near-coast Installation Manual for details.
 Made in China

**WEEE only for EU market.
 **** Please refer to Suntech Product Warranty for details.

STP325 - 24/Vfj
STP320 - 24/Vfj
STP315 - 24/Vfj

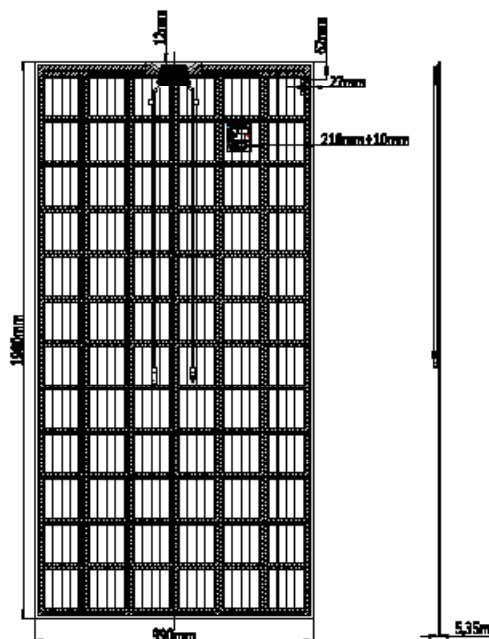

Current-Voltage & Power-Voltage Curve (325)

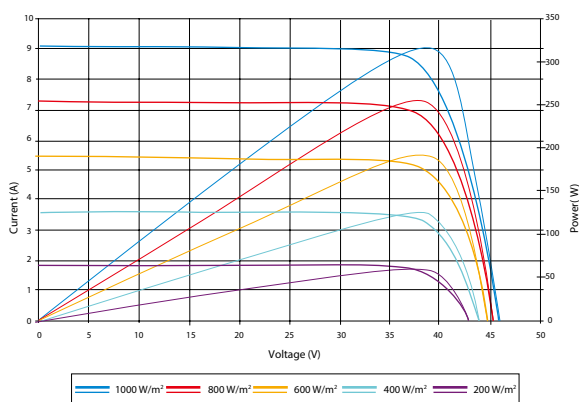

Electrical Characteristics

STC	STP325-24/Vfj	STP320-24/Vfj	STP315-24/Vfj
Maximum Power at STC (Pmax)	325 W	320 W	315 W
Optimum Operating Voltage (Vmp)	37.3 V	37.1 V	36.8 V
Optimum Operating Current (Imp)	8.72 A	8.63 A	8.56 A
Open Circuit Voltage (Voc)	45.9 V	45.6 V	45.1 V
Short Circuit Current (Isc)	9.26 A	9.14 A	9.02 A
Module Efficiency	16.6%	16.3%	16.1%
Operating Module Temperature	-40 °C to +85 °C		
Maximum System Voltage	1500 V DC (IEC)		
Maximum Series Fuse Rating	15 A		
Power Tolerance	0/+5 W		

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

NOCT	STP325-24/Vfj	STP320-24/Vfj	STP315-24/Vfj
Maximum Power at NOCT (Pmax)	240 W	235 W	229 W
Optimum Operating Voltage (Vmp)	34.2 V	33.9 V	33.2 V
Optimum Operating Current (Imp)	6.99 A	6.94 A	6.91 A
Open Circuit Voltage (Voc)	42.2 V	41.9 V	41.5 V
Short Circuit Current (Isc)	7.49 A	7.40 A	7.30 A

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%


Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.41 %/°C
Temperature Coefficient of Voc	-0.33 %/°C
Temperature Coefficient of Isc	0.067 %/°C

Mechanical Characteristics

Solar Cell	Polycrystalline silicon 6 inches
No. of Cells	72 (6 × 12)
Dimensions	1980 × 990 × 5mm without J-box
Weight	23.5 kgs
Front/Back Glass	2.0 mm tempered glass
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	TUV & UL 4.0 mm ² (0.006 inches ²), symmetrical lengths (-) 1100mm (43.3 inches) and (+) 1100 mm (43.3 inches)
Connectors	LEONI connectors (LSC-R1)

Dealer information



Product specification is subjected to change for improvement. Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

Packing Configuration

Container	20' GP	40' GP	40' HC
Pieces per pallet	38	38	38
Pallets per container	5	11	22
Pieces per container	190	418	836